


**TYPICAL REUSE SIGNAGE**

NOT TO SCALE

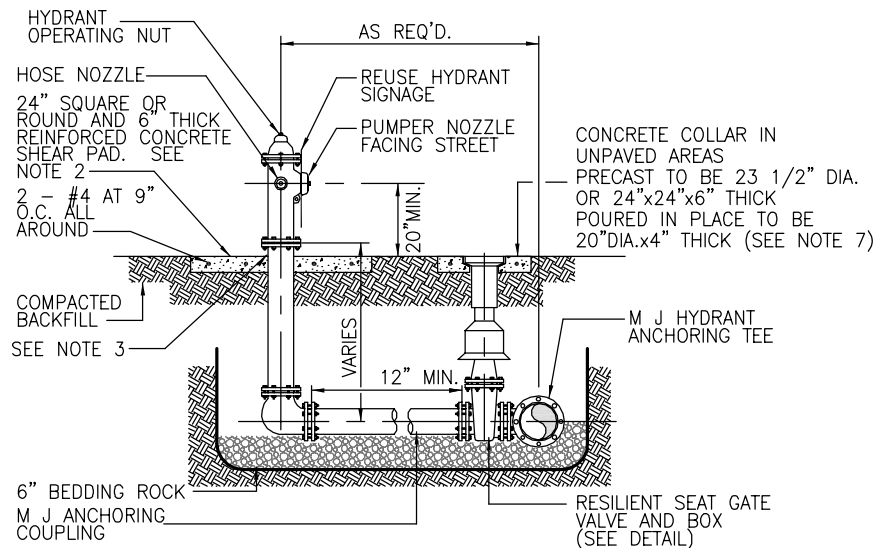

- NOTES:
1. HYDRANT SHALL BE SUPPLIED WITH A WEEP HOLE.
  2. THE DEVELOPER MAY INSTALL THE SHEAR PAD RECESSED UP TO 4 INCHES BELOW FINISHED GRADE AND SOD THE RECESSED SECTION.
  3. CLEARANCE BETWEEN BOTTOM OF BOLTS AND TOP OF SHEAR PAD SHALL BE A 6" MINIMUM.
  4. APPROVED HYDRANT MODELS ARE AMERICAN DARLING B-84-B, M+H A-129, & AVK. NO SUBSTITUTIONS WILL BE ALLOWED.
  5. EPOXY PAINT HYDRANT PANTONE 522-C
  6. ATTACH SIGNAGE SELECTED BY CITY AT PUMPER NOZZLE.
  7. ALL VALVE COVERS TO BE PAINTED WITH EXPOXY PAINT. WATERMAIN (BLUE), FORCEMAIN (GREEN), & RE-USE (PURPLE)

**REUSE HYDRANT ASSEMBLY DETAIL**

NOT TO SCALE

REV	DATE	BY	REVISIONS



**WATER AND REUSE**  
**REUSE HYDRANT**  
**TECHNICAL STANDARDS MANUAL**  
 CITY OF LYNN HAVEN FLORIDA

CAD FILE:	WARVN
DWN BY:	JEH
DATE:	22 SEP 08
SHEET NO:	18 OF 18
DETAIL:	R-18