


**TYPICAL REUSE SIGNAGE**

NOT TO SCALE

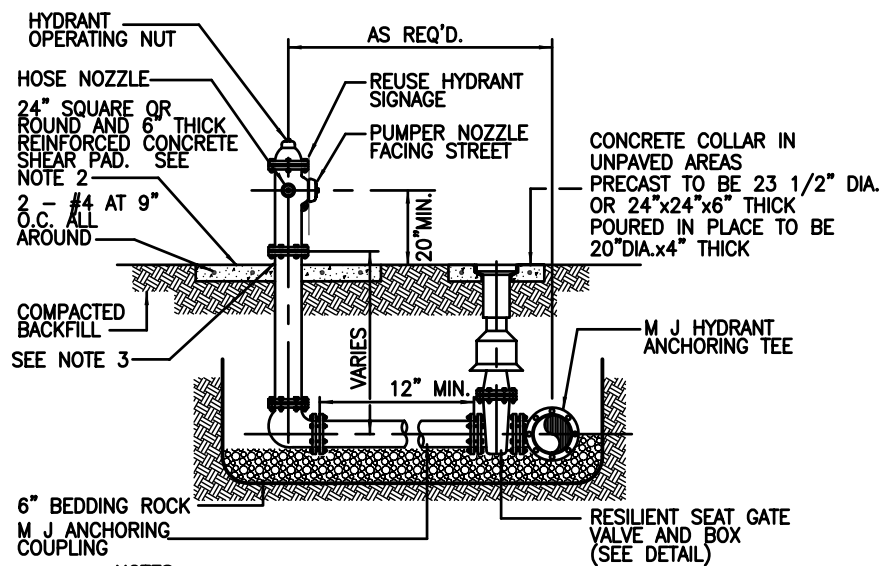

- NOTES:
1. HYDRANT SHALL BE SUPPLIED WITH A WEEP HOLE.
  2. THE DEVELOPER MAY INSTALL THE SHEAR PAD RECESSED UP TO 4 INCHES BELOW FINISHED GRADE AND SOD THE RECESSED SECTION.
  3. CLEARANCE BETWEEN BOTTOM OF BOLTS AND TOP OF SHEAR PAD SHALL BE A 6" MINIMUM.
  4. APPROVED HYDRANT MODELS ARE AMERICAN DARLING B-84-B, M+H A-129, & AVK. NO SUBSTITUTIONS WILL BE ALLOWED.
  5. EPOXY PAINT HYDRANT PANTONE 522-C
  6. ATTACH SIGNAGE SELECTED BY CITY AT PUMPER NOZZLE.

**REUSE HYDRANT ASSEMBLY DETAIL**

NOT TO SCALE

Date: Feb 20, 2009, 1:06pm User ID: chmFile: P:\14340 Comp Plan ULDC and Standard details\Drawings\REVISIONS TWO\REUSE.dwg



**TECHNICAL STANDARDS MANUAL**

**WATER AND REUSE REUSE HYDRANT TECHNICAL STANDARDS MANUAL**  
CITY OF LYNN HAVEN FLORIDA

CAD FILE:	WARVN
DWN BY:	JEH
DATE:	22 SEP 08
SHEET NO:	18 OF 18
DETAIL R-18	

© CITY OF LYNN HAVEN ALL RIGHTS RESERVED. NO PART OF THIS DOCUMENT MAY BE REPRODUCED OR UTILIZED IN ANY FORM WITHOUT PRIOR WRITTEN AUTHORIZATION OF THE CITY OF LYNN HAVEN